




# EZYFLEX® PEXI

## PEX hose with stainless steel braid DN08



## Sanitary

Sanitary appliances and taps for the public sector and hospitals

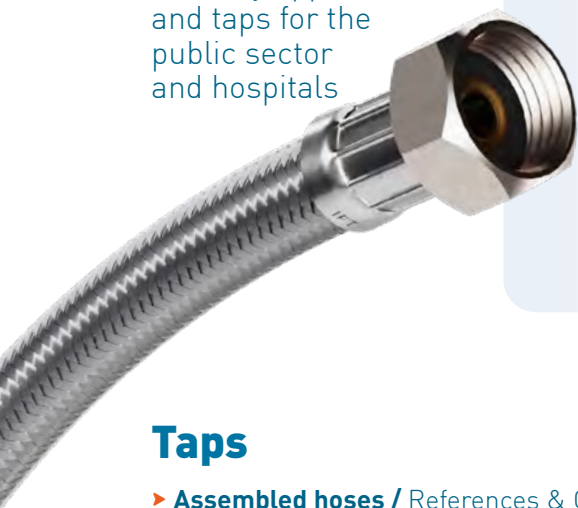

### ► Composition:

- PEX tube
- AISI 304 stainless steel braid
- Nickel-plated brass fittings
- Stainless steel crimping bushings

### ► Sealing:

- Flat gasket on flat seat
- O-ring on metric male thread
- Barbed fitting for smooth tube for dual-taper fitting

### ► Standard lengths:

150, 300, 500, 700, 1000 mm

### ► Application:

Hot and cold water supply for taps, mixers and sanitary appliances for the public sector and hospitals

### ► Technical data



Maximum temperature  
**+90°C**



Max operating pressure **10 bar**



**8.2 x 11.7 mm (DN08)**



Minimum bending radius **35 mm**



Chlorine shock treatment possible





### CUSTOM OFFER

- Specific length: **150 mm to over 10,000 mm**  
*MOQ depending on the desired length*
- Customisable fittings: diameter, material, etc.
- Customisable packaging: contact us

## Taps

### ► Assembled hoses / References & Configurations

Reference	Hose	Fitting 1 / Thread		Fitting 2 / Thread	
XI08P1M10		Female	3/8"	Short male	M10x100
XI08P1M11					M11x100
XI08P1M12			1/2"		M12x100
XI08P2M10					M10x100
XI08P1M10		Female	3/8"	Long male	M10x100
XI08P1M11					M11x100
XI08P1M12			1/2"		M12x100
XI08P2M10					M10x100



## CUSTOM OFFER

- Specific length: **150 mm to over 10,000 mm**  
MOQ depending on the desired length
- Customisable fittings: diameter, material, etc.
- Customisable packaging: contact us

## Sanitary appliances

### ► Assembled hoses / References & Configurations

Reference	Hose	Fitting 1 / Thread		Fitting 2 / Thread	
XI08P1M1		Female	3/8"	Male	3/8"
XI08P2M2			1/2"		1/2"
XI08P4M4			3/4"		3/4"
XI08P1P1		Female	3/8"	Female	3/8"
XI08P2P2			1/2"		1/2"
XI08P4P4			3/4"		3/4"
XI08P1C1		Female	3/8"	Angled	3/8"
XI08P2C2			1/2"		1/2"
XI08P4C4			3/4"		3/4"
XI08M1B1		Male	3/8"	Dual-taper	Ø10 mm
XI08M2B2			1/2"		Ø12 mm
XI08M4B3			3/4"		Ø14 mm
XI08P1B1		Female	3/8"	Dual-taper	Ø10 mm
XI08P2B2			1/2"		Ø12 mm
XI08P4B3			3/4"		Ø14 mm
XI08B1B1		Dual-taper	Ø10 mm	Dual-taper	Ø10 mm
XI08B2B2			Ø12 mm		Ø12 mm
XI08B3B3			Ø14 mm		Ø14 mm