




EKOFLEX® ET

EPDM hose with textile braid DN15 to 50



Heating

Heat pumps

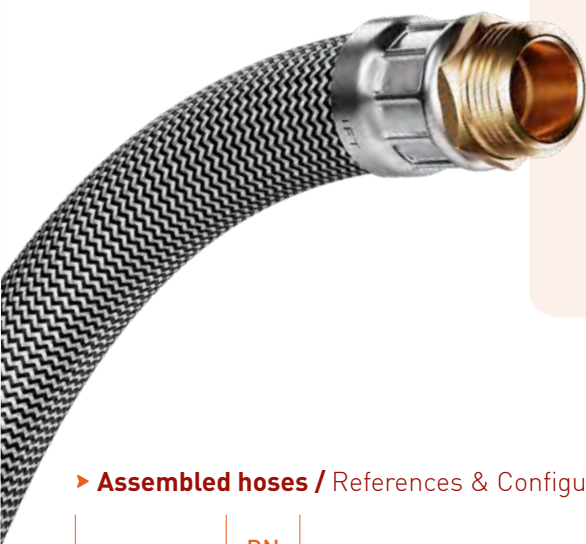

Composition:

- EPDM tube according to EN 681-1 type WB
- Textile braid
- Brass fittings (except nickel-plated brass elbow DN20 and 26)
- Stainless steel crimping bushings DN15 to 33 and aluminium DN40 and 50

Sealing:

- Flat gasket on flat seat (optional)

Standard lengths:

300, 500, 700, 1000 mm

Application:

Hot and cold water supply for heat pumps.
Can be fitted onto mixed reversible installations

Technical data



Maximum temperature
+90°C (peaks to +110°C)



Max operating pressure
16 Bar (DN15)
10 Bar (DN20 and 26)
6 Bar (DN33 to 50)



15 x 22 mm (DN15)
20 x 28 mm (DN20)
26 x 35 mm (DN26)
33 x 43 mm (DN33)
40 x 50 mm (DN40)
50 x 63 mm (DN50)



CUSTOM OFFER

- ▶ Specific length: **150 mm to over 10,000 mm**
MOQ depending on the desired length
- ▶ Customisable fittings: diameter, material, etc.
- ▶ Customisable packaging: contact us

Assembled hoses / References & Configurations

Reference	DN (mm)	Hose	Fitting 1 Thread		Fitting 2 Thread		Bending radius (mm)
ET15P2M2	15		Female	1/2"	Male	1/2"	88
ET15P4M4				3/4"		3/4"	
ET20P4M4	20			3/4"		3/4"	112
ET26P5M5	26			1"		1"	140
ET33P6M6	33			1"1/4		1"1/4	172
ET40P7M7	40			1"1/2		1"1/2	392
ET50P8M8	50			2"		2"	488
ET15P2P2	15					Female	1/2"
ET15P4P4		3/4"	3/4"				
ET20P4P4	20	3/4"	3/4"		112		
ET26P5P5	26	1"	1"		140		
ET33P6P6	33	1"1/4	1"1/4		172		
ET40P7P7	40	1"1/2	1"1/2		392		
ET50P8P8	50	2"	2"		488		
ET15P2C2	15		Female		1/2"		Angled
ET15P4C4				3/4"	3/4"		
ET20P4C4	20*	3/4"		3/4"	112		
ET26P5C5	26*	1"		1"	140		
ET33P6C6	33*	1"1/4		1"1/4	172		
ET40P7C7	40*	1"1/2		1"1/2	392		

*Female nickel-plated brass elbow fitting



IFT Groupe Omerin SAS
Zone Industrielle - F 63600 Ambert
Tel: +33 (0)4 73 82 32 33
ift@omerin.com

www.flexibles.com

The information provided on this data sheet is indicative and subject to change without notice. All hoses ordered must comply with IFT's installation recommendations, which can be viewed in its catalogue. IFT can under no circumstances be held liable for any incidents arising from inappropriate use, particularly in the case of installation not carried out in accordance with the rules of the trade and the standards in force. © Registered trademark of IFT. Drawings and photos are not contractually binding. Reproduction is prohibited without the prior consent of IFT.