




QUAL'IFT® PEXI

PEX hose with stainless steel braid DN08 to 12

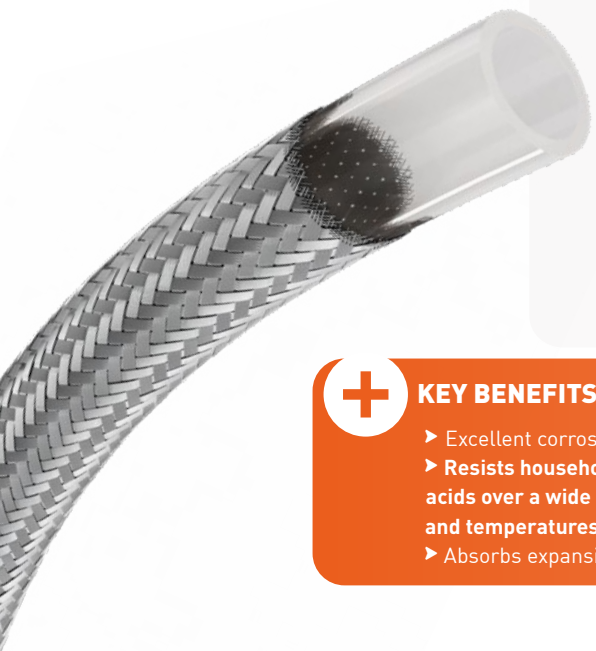

► Composition:

- PEX tube
(translucent cross-linked polyethylene)
- AISI 304 stainless steel braid

► Lengths:

See table below

Roll packaging

[other types of packaging on request]

► Application:

- Sanitary water passage

► Technical data



Operating temperature
-15°C to +90°C peaks at +110°C



DN	Nom. pressure (in bar)	Max. Pressure (in bar)
08, 10, 12	16	20



See table below



Very good chemical resistance



KEY BENEFITS

- Excellent corrosion and ageing resistance
- **Resists household and chemical waters, acids over a wide range of concentrations and temperatures**
- Absorbs expansion and water hammer
- Accidental abrasion resistance
- Good UV resistance
- Does not transmit hose noise



ASSEMBLY

- **QUAL'IFT®** hoses must be assembled by scrupulously following the recommended rules and stages in paragraph "Recommendations for use"



CUSTOM OFFER

- Contact us for all your specific requirements

► Hoses for your low-pressure applications / References & Compositions

Reference	DN (mm)	Diameter int. x ext. (mm)	Burst pressure (Bar)	MOQ (m)	Bending radius (mm)
PEXI 08	08	8 x 12.3	110	Contact us	35
PEXI 10	10	9.9 x 14			50
PEXI 12	12	12.7 x 17	90		65